



INSTRUCTIONS FOR RATCHETING EXHAUST PIPE CUTTER

MODEL NO: **VS16371**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual



Wear protective gloves

1. SAFETY

- ❑ **WARNING!** The blade used is sharp and should be treated with due caution.
- ✓ Store the cutter in a safe childproof place when not in use.
- ✓ Use in a suitable, clean and tidy work area, free from unrelated materials. Ensure there is adequate lighting.
- ✓ Wear protective gloves.
- ✗ **DO NOT** continue to attempt cutting any pipe that withstands penetration.
- ✗ **DO NOT** insert a finger into the cutting area at any time.
- ✗ **DO NOT** turn the pipe whilst cutting.
- ✗ **DO NOT** allow untrained people to use the cutter.
- ✗ **DO NOT** allow children to use or play with the cutter.
- ✗ **DO NOT** use the cutter for tasks it is not designed to perform.
- ✗ **DO NOT** operate cutter if any parts are damaged or missing as this may cause failure and/or personal injury.
- ✗ **DO NOT** operate the cutter when you are tired or under the influence of alcohol, drugs or intoxicating medication.


2. INTRODUCTION

Universal application pipe cutter designed for where access is restricted. Ratchet mechanism allows cutting without having to rotate the tool completely around the tubing. Cuts up to 3mm thick and is suitable for the toughest materials including stainless steel exhaust pipes. Tightening screw allows quick and easy jaw adjustment and enables a one handed operation. Ensures fast and problem free cutting of exhaust pipes and limits the risk of hand fatigue and personal injury.


3. SPECIFICATION

Model no: VS16371
 Maximum thickness:..... 3mm
 Cutting capacity: Ø29 - 67mm
 Replacement cutting wheel: VS16371B


4. OPERATION

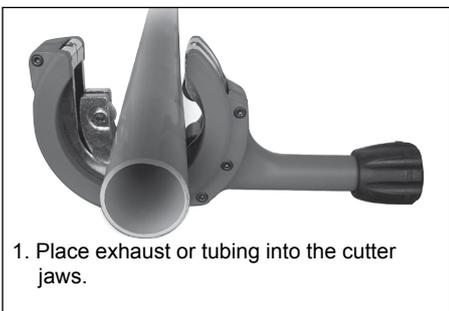


1. Place exhaust or tubing into the cutter jaws.

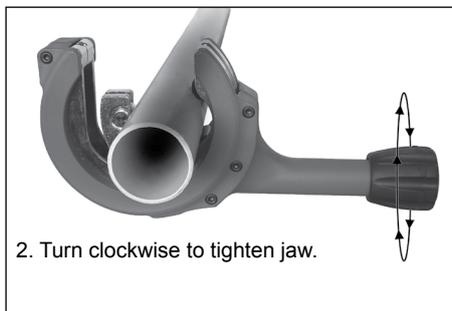


2. Turn clockwise to tighten jaw.

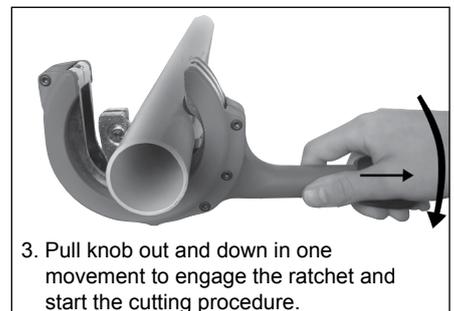


3. Pull knob out and down in one movement to engage the ratchet and start the cutting procedure.

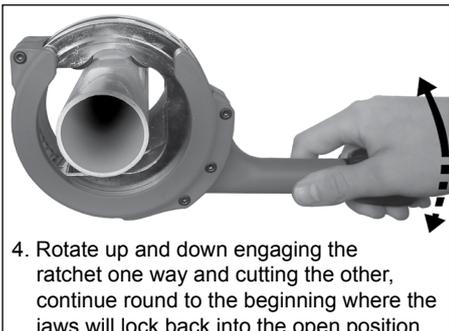

4. Rotate up and down engaging the ratchet one way and cutting the other, continue round to the beginning where the jaws will lock back into the open position.

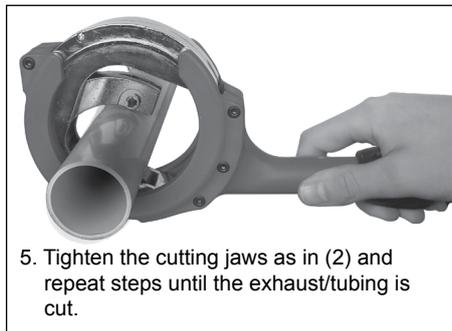

5. Tighten the cutting jaws as in (2) and repeat steps until the exhaust/tubing is cut.

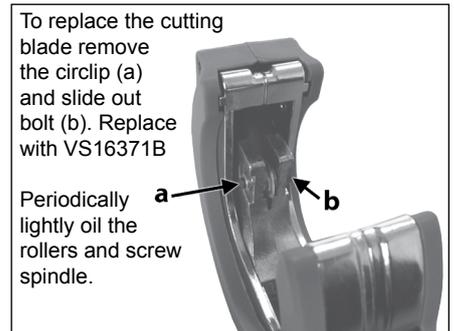

To replace the cutting blade remove the circlip (a) and slide out bolt (b). Replace with VS16371B

Periodically lightly oil the rollers and screw spindle.

Parts support is available for this product. To obtain a parts listing and/or diagram, please log on to www.sealey.co.uk, email sales@sealey.co.uk or telephone 01284 757500



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk